

# Performance of Advanced Hybrid Link Adaptation Algorithms in Mobile Radio Channel

Vladimír WIESER<sup>1</sup>, Vladimír PŠENÁK<sup>2</sup>

<sup>1</sup> Dept. of Telecommunications and Multimedia, University of Žilina, Univerzitná 1, 010 26 Žilina, Slovak Republic

<sup>2</sup> SIEMENS Program and System Engineering s.r.o., Hurbanova 21, 010 01 Žilina, Slovak Republic

vladimir.wieser@fel.uniza.sk, vladimir.psenak@siemens.com

**Abstract.** *The fast power adaptation is essential for WCDMA based mobile radio networks, as 3G UMTS. Although the first version of UMTS has been released in 1999 (Release 99) evolution was not finished yet. Quality of Service (QoS) and user data rate (e.g. HSDPA and HSUPA) are continuously increasing from release to release. Even though link adaptation frequency (1500 times per second) seems to be enough to span accidental fading of mobile radio channel, used link adaptation algorithm is based on non-actual information about mobile radio channel state, which causes transmitter reaction delay to the actual channel state. Usage of appropriate prediction method to estimate near future channel state seems to be a valuable step to improve hybrid link adaptation algorithm. In this article we have described and simulated the new SIR-slot based advanced link adaptation algorithms. Algorithms were designed to increase efficiency of data transmission among a user equipment and base stations (uplink) for different simulation environments (pedestrian channel with mobile subscriber speed 5 km/h, 15 km/h and vehicular channel with speed 45 km/h).*

## Keywords

Next generation mobile networks, link adaptation algorithm, prediction methods, uplink data transmission efficiency, hybrid adaptation.

## 1. Introduction

The one of the latest 3G UMTS Release 05 (already active in the field) has brought advanced downlink data transmission HSDPA (High-Speed Downlink Packet Access) service, where the highest theoretical L1 data speed is above 10 Mbps. HSDPA implementation includes (H-ARQ) Hybrid Automatic Repeat Request, AMC (Adaptive Modulation and Coding), fast cell search, and advanced receiver design and the prepared UMTS Release 06 includes MIMO (Multiple-Input Multiple-Output) communication [3]. In the reverse (uplink) direction the HSUPA (High Speed Uplink Packet Access) is available from Release 06. HSUPA implementation includes higher-order

modulation, shorter TTI (Transmission Time Interval), H-ARQ, etc. Theoretical L1 uplink data rate is above 5.75 Mbps [4]. The new specified services prove that the evolution of 3G is still in progress, straightforward to LTE (Long Term Evolution) and there is an aim to achieve data rates and network throughput which will be interesting in comparison to fixed data networks. Even if, HSDPA/HSUPA implementation includes a lot of new modern techniques, these are working with certain traffic delay. We see the solution of this problem in using of appropriate mobile radio channel state prediction method [1], [5].

## 2. Mobile Radio Channel Prediction Model

The prediction of mobile radio channel is based on observed impulse responses, where one of the limiting factors is the estimation error. We assume that the channel can be approximated as time invariant over a block of symbols, because the broadband symbol rate is much higher in comparison with the channel fading rate (time variation of the channel during the estimation interval increases the estimation error) [1].

The principle of basic prediction model is depicted in Fig. 1 where relations between a transmitter and a receiver can be seen. The outer loop power control (OuLPC), located in the receiver, adapts (based on BER) the required  $SIR_R \gamma_i^t(t)$  to keep the required QoS<sup>t</sup>. The receiver calculates the error  $e_{\gamma_i^t}(t)$ , what is the difference between the required  $SIR_R \gamma_i^t(t)$  and the actually achieved (measured)  $SIR_A \gamma_i^t(t)$ . A measurement of  $SIR_A \gamma_i^t(t)$  is done in block  $F_i$ , where a suitable filter is located. The input signal to block  $F_i$  includes a fragment of the valid signal, an interference from other transmitters and a noise  $e_i^{AWGN}(t)$ .

The mobile radio channel gain  $G_i(t)$  [dB], the interference  $I_i(t)$  [dB], and the fragment of transmission power  $\mathcal{P}_i(t)$  [dB] are represented by the block named environment. The second output of  $F_i$  is information about the actual received signal power level  $p_i(t)$ , which is also the input of a prediction block  $P_i$ . Predictor  $P_i$  includes its own internal memory  $\bar{M}$  to store actual and previous power



Information about the momentary used transmission schema in UDCH is sent through the control channel [8].

The Outer loop power control (OuLPC) adjusts the required  $SIR_R$  to keep the required QoS.

The advanced hybrid link adaptation schema includes prediction methods, where near future channel state is estimated and this forecast is used to control power level (power step value). The advanced hybrid link adaptation algorithm flow diagram is depicted in Fig. 2 [13].

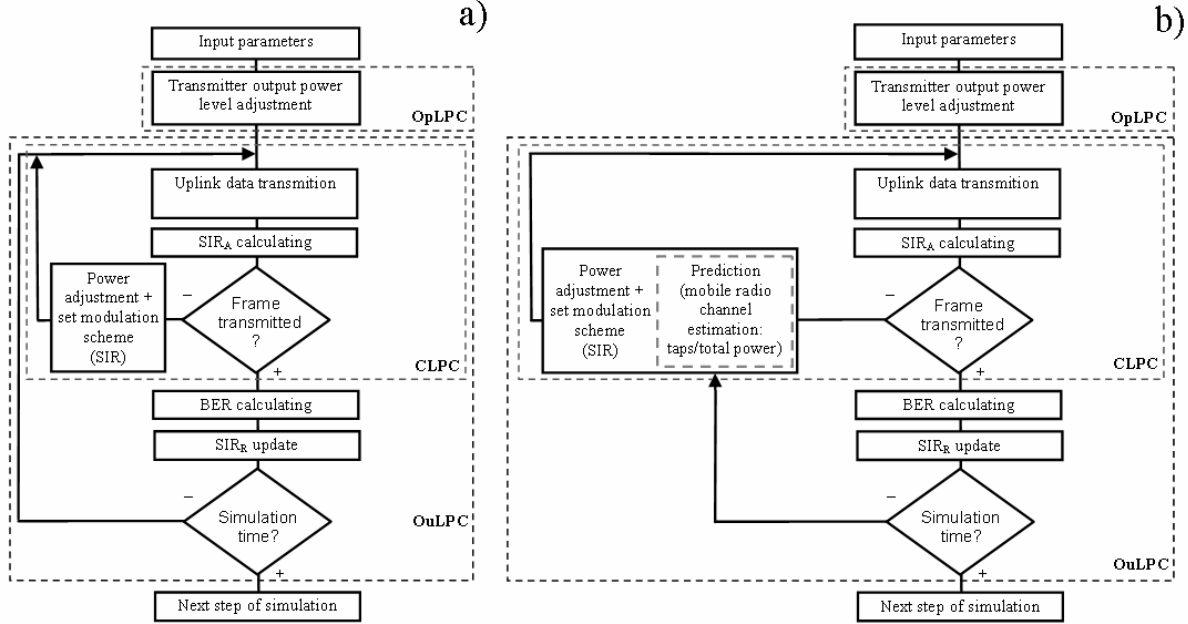


Fig. 2. a) Hybrid link adaptation algorithm [7], [9]. b) Advanced hybrid link adaptation algorithm.

## 4. Prediction Methods

There are several suitable mobile radio channel state predictors, deeply described in [1]. The simplest one is the sub-sampled direct linear FIR (Finite Impulse Response) predictor of the total mobile radio channel power, which performance is not sufficient to be used at higher UE equipment velocity (e.g. acceleration of UE increases the number of deep fadings of mobile radio channel [1]):

$$\hat{h}(t+L|t) = \varphi(t)\theta \quad (3)$$

where  $\hat{h}$  is the estimated value,  $L$  denotes the prediction interval, the column vector  $\theta = [\theta_1 \dots \theta_N]^T$  represents the complex valued predictor coefficients, and  $\varphi(t)$  is the row vector of past channel samples:

$$\varphi(t) = [h(t), h(t-\Delta t), \dots, h(t-(N-1)\Delta t)] \quad (4)$$

where  $h(t)$  denotes the complex valued observation,  $\Delta t$  denotes the time spacing between samples, and  $N$  is the number of predictor coefficients. The prediction error is given by:

$$\varepsilon_c(t) = h(t) - \hat{h}(t|t-L). \quad (5)$$

Prediction error has zero mean and therefore the minimum mean square error MMSE criteria to find predictor coefficients, will be equal to the variance:

$$\sigma_{\varepsilon_c}^2 = E\{\varepsilon_c(t)^2\}. \quad (6)$$

Predictor's performance is expressed by a predictor gain  $G(L)$ :

$$G(L) = 10 \log_{10} \frac{E[(h - E[h])^2]}{E[\varepsilon_c]}. \quad (7)$$

The efficient total power prediction used in simulations can be seen as the sum of the squared magnitude of the  $M$  taps predictions [1], [2]:

$$\hat{p}(t+L) = \sum_{k=1}^N |\hat{h}_k(t+L)|^2. \quad (8)$$

The prediction interval  $L$  depends on the time spacing  $\Delta t$  between the observed channel samples  $y(t)$ , therefore if there is a request to increase a prediction interval, input samples have to be subsampled.

The effect of observed samples subsampling against prediction gain  $G(L)$  is not high in the case of a low transceiver velocity. With the increasing transceiver velocity the number of deep fadings is rising and the designed subsampled predictor gain  $G(L)$  is getting low. The subsampling of input samples causes loss of details at higher velocity, what can be eliminated by using an iterative FIR predictor.

The adaptive iterative predictor reduces complexity because only one predictor has to be adapted for any prediction range. The proposed iterative predictor is less sensitive to errors with assumptions made in the filter model [1]. The principle of iterative predictor lies in reuse of

already predicted samples to predict another one (up to the interval of prediction). The general model of  $L$ -step predictor can be described [1]:

$$\hat{h}(t+L|t) = \varphi(t) \hat{\theta}(t+L|t). \quad (9)$$

The required prediction range is obtained in  $m$ -iterations, where  $m$  is divider of  $L$ , therefore subsampled predictor memory  $\varphi$  is extended into the future using predicted values:

$$\varphi(t+km|t) = [\hat{h}(t+km|t), \dots, \hat{h}(t+m|t), \hat{h}(t), \dots, \hat{h}(t+T-km)] \quad (10)$$

where  $k \in \{1, 2, \dots, T\}$  and  $T$  denotes the size of regressor. FIR predictor used for prediction of time varying system has time varying coefficients, therefore the output of the iterated one-step predictor is:

$$\begin{aligned} \hat{h}(t+m|t) &= \varphi(t) \hat{\theta}_m(t+m|t), \\ \hat{h}(t+2m|t) &= \varphi(t+m|t) \hat{\theta}_m(t+2m|t), \\ &\vdots \\ \hat{h}(t+L|t) &= \varphi(t+L-m|t) \hat{\theta}_m(t+L|t). \end{aligned} \quad (11)$$

where  $\hat{\theta}_m(t+km|t)$  denotes an  $m$ -step predictor with coefficients extrapolated  $km$  steps ahead [1].

## 5. Simulation Model Assumptions

Mathematical model used in simulation includes WCDMA based base station (receiver only), mobile station (transmitter only), mobile radio channel model and hybrid link adaptation block (Transmitter Power Coding and Modulation Control - TPCMC command related blocks). The block diagram of simulation model is depicted on the fig. 3. Presented model does not include downlink control and data transport channels, but continuous random data stream is generated in *information source* block. There is only one uplink *errorless control channel* created to transport feedback TPCMC command. Downlink data stream is secured in *channel coder*, after that *spread* (data stream is converted to chip rate 3.84 Mchip/s over the selected spreading factor) and *scrambled* (PN code). The last block - transmitter block in the row is *digital modulator* and output *amplifier* [10, 12]. Output samples are complex sample  $\dot{x}_i(t) = i_i(t) + jq_i(t)$  at chip rate, where absolute value of complex sample represents nominal digital output power level  $p_i^r(t) = |\dot{x}_i(t)|$ .

Inner cell interference  $I_i(t)$  is represented by AWGN at the required level. Rayleigh mobile radio channel model  $G_i(t)$  is based on the Clark's statistical model of mobile radio channel [6]. The environment block includes fragmentation of the transmitting signal  $\mathcal{P}_i$ .

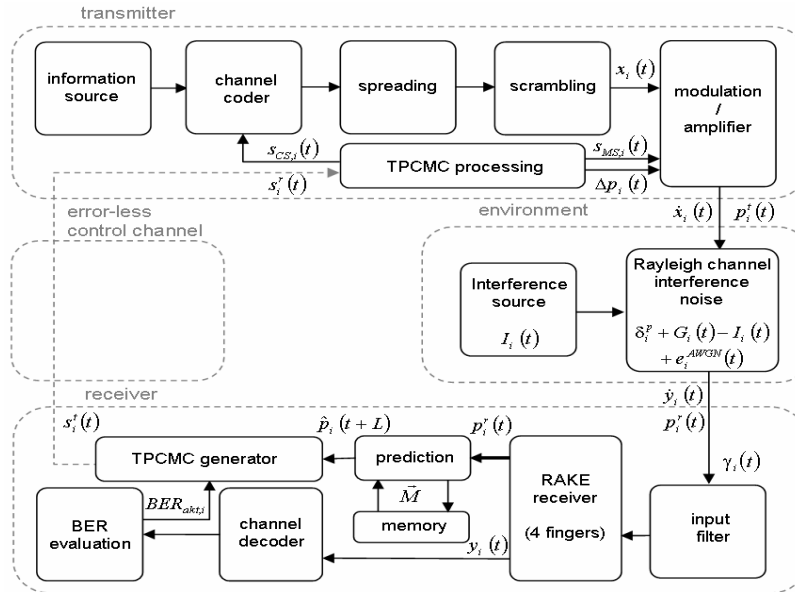


Fig. 3. WCDMA based transmitter / receiver block diagram.

The received signal  $y_i(t)$  is filtered and resampled in the *input filter* block. The main received signal processing is done in the *RAKE receiver*, where four main taps are traced. The RAKE receiver finger includes a demodulator, a delay block, a descrambling block, and a despreading block. Tracked paths are weighted and combined to one data stream  $y_i(t)$ , which is decoded in the *channel decoder*. The block *BER evaluation* compares the received data stream with the sent delayed data

stream (logical connection is not depicted, this process is running in the background of simulation). The *prediction* block inputs represent information about the total received power level  $p_i^r(t)$  (or taps received power level). An estimation of a future channel state  $\hat{p}_i(t+L)$  and actual BER ( $BER_{akt,i}$ ) is used to create an appropriate TPCMC command. The transmitted TPCMC command includes the transmitter power step value  $\Delta p_i(t)$ , the required coding schema  $s_{CS,i}(t)$ , and the required modulation schema  $s_{MS,i}(t)$ .

The presented simulation model simplifications have no influence to the achieved prediction gain. One of the model advantages is the possibility of simulation repetition with the same mobile radio channel behavior (including initial state and changes). Therefore prediction methods can be compared under the same simulation conditions.

## 6. Results

The simulation has been run for 100 frames (stabilization of power loop control parameters takes 20 frames). UE transmitted test data pattern (random data source). Simulation results were achieved with spreading factor 8 and convolution coder 1/2. The mobile radio channel model was set to pedestrian (velocity range: 5 m/h and 15 m/h) or vehicular (velocity range: 45 m/h) [11]. The interference level average value was set to -48 dBm, what represents maximum output power level boundary condition for UE (UE maximum output power level = 33 dBm and minimum output power level = 15 dBm). Both algorithms were compared (Fig. 2) where the advanced hybrid link adaptation algorithm with non-adaptive power prediction (TPCMC  $n_{total}=1$ ) and the advanced hybrid link adaptation algorithm with adaptive iterative prediction (TPCMC  $n_{total}>1$ ) were added into the simulation model. The non-adaptive total power prediction interval  $L$  was set to 1

(1 time slot) because TPCMC command processing and traffic delay was set to 1 time slot at the presented model. The prediction interval  $L$  at iterative prediction was set from 2 to 10. The  $L$  is equal to the number of iterations to estimate the mobile radio channel state at the required time slot. There was the fixed number of predictor coefficients  $N=6$  used for both predictors. The achieved average L1 data BERs at various UE velocity are depicted in graph in Fig. 4. The link adaptation algorithm efficiency can be expressed through the average difference between  $SIR_R$  and  $SIR_A$ :  $e_{SIR} = E[SIR_R - SIR_A]$  where simulation shows that acceptable are values of  $|e_{SIR}| < 3$  dB.

During simulations the following values were achieved: minimum  $|e_{SIR}| > 0.1$  dB (TPCMC  $n_{total}=0$ ) and maximum  $|e_{SIR}| < 1.72$  dB (TPCMC  $n_{total}=10$ ), what confirms that the link adaptation algorithms parameters were set properly. Very important indicator of prediction performance is the achieved prediction gain. The advanced hybrid link adaptation algorithm with power prediction achieved the maximum prediction gain  $G$ (1 time slot) of 3.61 dB (5 km/h pedestrian), but the increase of TPCMC traffic delay (length of prediction) causes the decreasing of the prediction gain. The simulation of the advanced hybrid link adaptation algorithm in vehicular environment under UE velocity 45 km/h shows that the used prediction performance is insufficient to achieve lower L1 BER. The achieved gain values were below 0.5 dB.

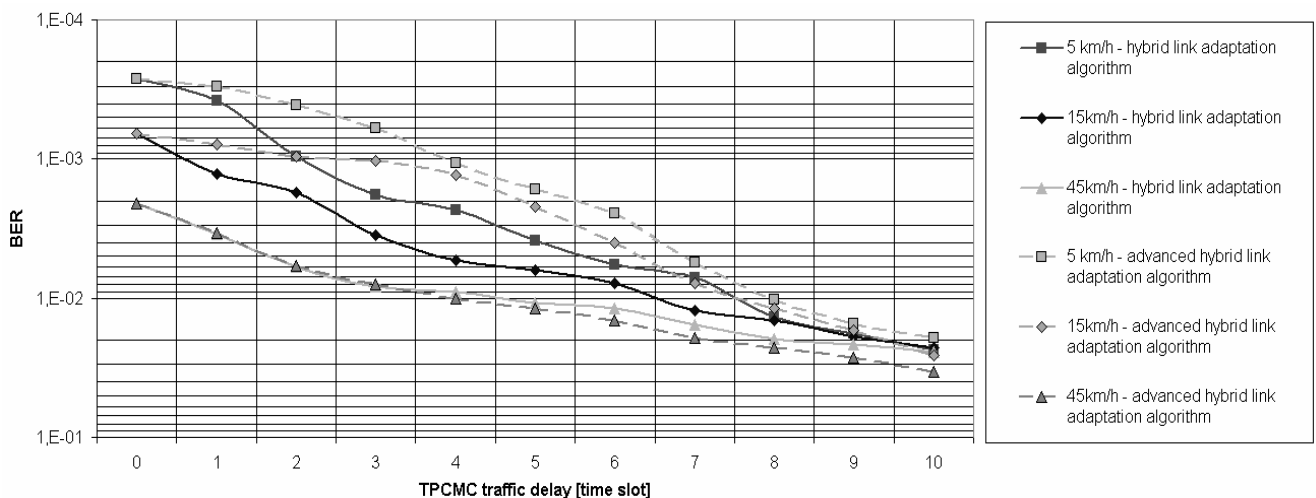


Fig. 4. Average L1 data BERs at various MS velocity and TPCMC traffic delay.

## 7. Conclusion

The simulation results depicted in Fig. 4 show that the application of appropriate mobile radio channel prediction methods is meaningful. The maximum improvement was observed in the pedestrian environment (5 km/h) when TPCMC was delayed about three time slots ( $n_{total}=3$ ): The hybrid link algorithm achieved the average bit error rate  $BER = 1.813E-03$  in comparison with the average  $BER = 0.602E-03$  of the advanced hybrid link algorithm. The simulation also shows that the presented advanced

hybrid link algorithm is not powerful enough to increase high data rate (e.g. decrease BER, because all wrong transmitted data block have to be retransmitted) at higher UE velocity (vehicular velocity range and environment) in comparison with the required computation and memory requirements. Average L1 data BER was not decreased, even at higher TPCMC  $n_{total}$  BER was increased. Even if the performance of the used power prediction is not sufficient to keep high data rate at high UE velocity, there is still a space to improve prediction methods to achieve valuable results, e.g. adaptive iterative prediction can be

used to estimate several samples, where the short-term prediction interval can be used to generate TPCMC command and long-term to estimate the trend of mobile radio channel.

## Acknowledgements

The authors gratefully acknowledge the support from the VEGA project No. 1/4067/07.

## References

- [1] EKMAN, T. *Prediction of Mobile Radio Channels – Modeling and Design*. Dissertation for the degree of Doctor of Philosophy in Signal Processing at Uppsala University, Sweden, 2002, ISBN 91-506-1625-0.
- [2] EKMAN, T. *Prediction of Mobile Radio Channels*. PhD thesis, Uppsala University, Sweden, 2001.
- [3] PŠENÁK, V., WIESER, V. High speed downlink packed access in UMTS network. *Advances in Electrical Engineering*. University of Žilina. 2005, vol. 4, no. 1, pp. 8-13, ISSN 1336-1376.
- [4] HOLMA, H., TOSKALA, A. *HSDPA / HSUPA for UMTS*. Wiley, 2001. ISBN: 0-470-01888-4
- [5] WIESER, V., PŠENÁK, V. *Analysis of mobile radio channel prediction methods*. *Science & Military journal*, 2007, vol. 2, no. 2, pp.42-45. The Academy of the Armed Forces of General Milan Rastislav Stefanik, Demanova 393, 031 01 Liptovsky Mikulas, Registered No: 3487/2005, ISSN 1336-8885
- [6] WIESER, V., PŠENÁK, V. WCDMA Mobile radio network simulator with hybrid link adaptation. *Advances in Electrical Engineering*. University of Žilina. 2005, vol. 4, no. 3, pp. 200-205. ISSN 1336-1376.
- [7] WIESER, V., PŠENÁK, V. BER and SIR based hybrid link algorithms performance in mobile radio channel. *Radioengineering* 2005, vol. 14, no.4, p. 81-86. ISSN 1210-2512.
- [8] CASTRO, P. J. *The UMTS Network and Radio Access Technology – Air Interface Techniques for Mobile Systems*. Wiley, 2001, ISBN 0 471 81375 3.
- [9] WIESER, V., PŠENÁK, V. Data rate increasing for high speed multimedia services in enhanced WCDMA mobile radio network. In *IWSSIP 2006, 13th International Conference on Systems, Signals and Image Processing*. Budapest (Hungary), 2006, pp.75-78, ISBN 80-89082-09-2.
- [10] 3GPP TS 25.213 V6.2.0 (2005-03). *Spreading and Modulation (FDD)*.
- [11] ETSI TR 101 112 V3.2.0. (1998-04). *Selection Procedures for the Choice of Radio Transmission Technologies of the UTM*.
- [12] 3GPP TS 25.212 V6.4.0 (2005-03). *Multiplexing and Channel Coding (FDD)*.
- [13] WIESER, V., PŠENÁK, V. Performance of hybrid link adaptation algorithm with prediction of mobile radio channel state. In *TPS 2007, 30th International Conference on Telecommunications and Signal Processing*. Brno (Czech Republic), 2007, pp.32-35, ISBN 978-80-214-3445-5.

## About Authors...

**Vladimír WIESER** was born in Púchov in 1954. He received the M.S. degree in Electrical Engineering and Communication from the Military Academy Brno, Czech Republic, in 1978, and Ph.D. degree from the Military Academy Liptovský Mikuláš in 1996. Since 2001 he works as Ass. Prof. at the Telecommunication Department, University of Žilina, Slovak Republic. His research includes mobile communication networks, especially power and rate adaptation, radio resource management.

**Vladimír PŠENÁK** was born in Ilava in 1981. He received the M.S. degree in Telecommunication from the University of Žilina in 2004 and now he is working in Siemens Program and System Engineering. He is also working on his Ph.D. degree. His main interests include programming in mobile communication networks, especially adaptation algorithms, power signal prediction in mobile channel.

The screenshot displays the ISI Web of Knowledge interface within a Mozilla Firefox browser window. The browser's address bar shows the URL <http://apps.isiknowledge.com>. The page header includes navigation links like 'Sign In', 'My EndNote Web', 'My ResearcherID', and 'My Citation'. The main search area is titled 'Web of Science®' and features a search bar with the text 'Radioengineering' and a dropdown menu set to 'Publication Name'. Below the search bar, there is a section for 'Additional Resources' and a 'Search for:' field. The search results are displayed under the heading 'Results' and show a single entry: '1. Title: Planar tri-band antenna design (vol 17, pg 36, 2008)'. The entry details include the author(s) 'Pokorny M, Horak J, Raida Z', the source 'RADIOENGINEERING', volume '17', issue '2', pages '55-55', and the publication date 'JUN 2008'. The interface also includes a 'Refine Results' section on the left and a 'Page 1 of 1' indicator at the bottom.